

Alure™ Automatic Residential Door System



Elevator Solutions International Inc.

The **Alure™** Automatic Residential Operator and Entrance System is the 1st product designed specifically for the *residential* installer & tested to A17 commercial code.

Operator

- Uses 120 VAC, 60 Hz, 5 Amp incoming power.
- Shipped complete with track, clutch, & switches.
- Production model has AC motor, requires 220 VAC.
- Linear Closed Loop Control.

Entrance

- Shipped complete with track, interlock, and closers.
- 2 hour UL Fire Rating.
- Interlock UL listed with 1,000,000 cycle test.
- No struts on 3 Speed model.
- Tested at nearly twice the required load capacity.



Space Saving
36" 3 Speed
requires only 52"
hoistway footprint.

EASY to Install

Saves Field Time

Entrance


Is assembled in the box. Simply tip into place, secure the sill & frame, and then hang the doors.

Operator

Also assembled. Set into place, power & run

3 way adjustment on sills, track & doors.

No entrapment space * No door swinging into hallway *
No pinch points on doors *
Increases home value

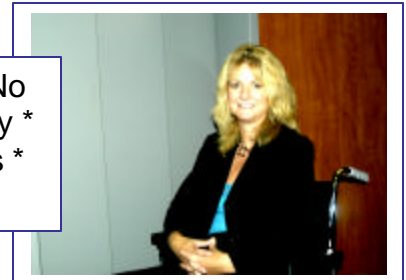

Call your package provider & ask for Alure™ products

OR

Contact Elevator Solutions International Inc. * 866-473-5266 * www.info@elevsol.com