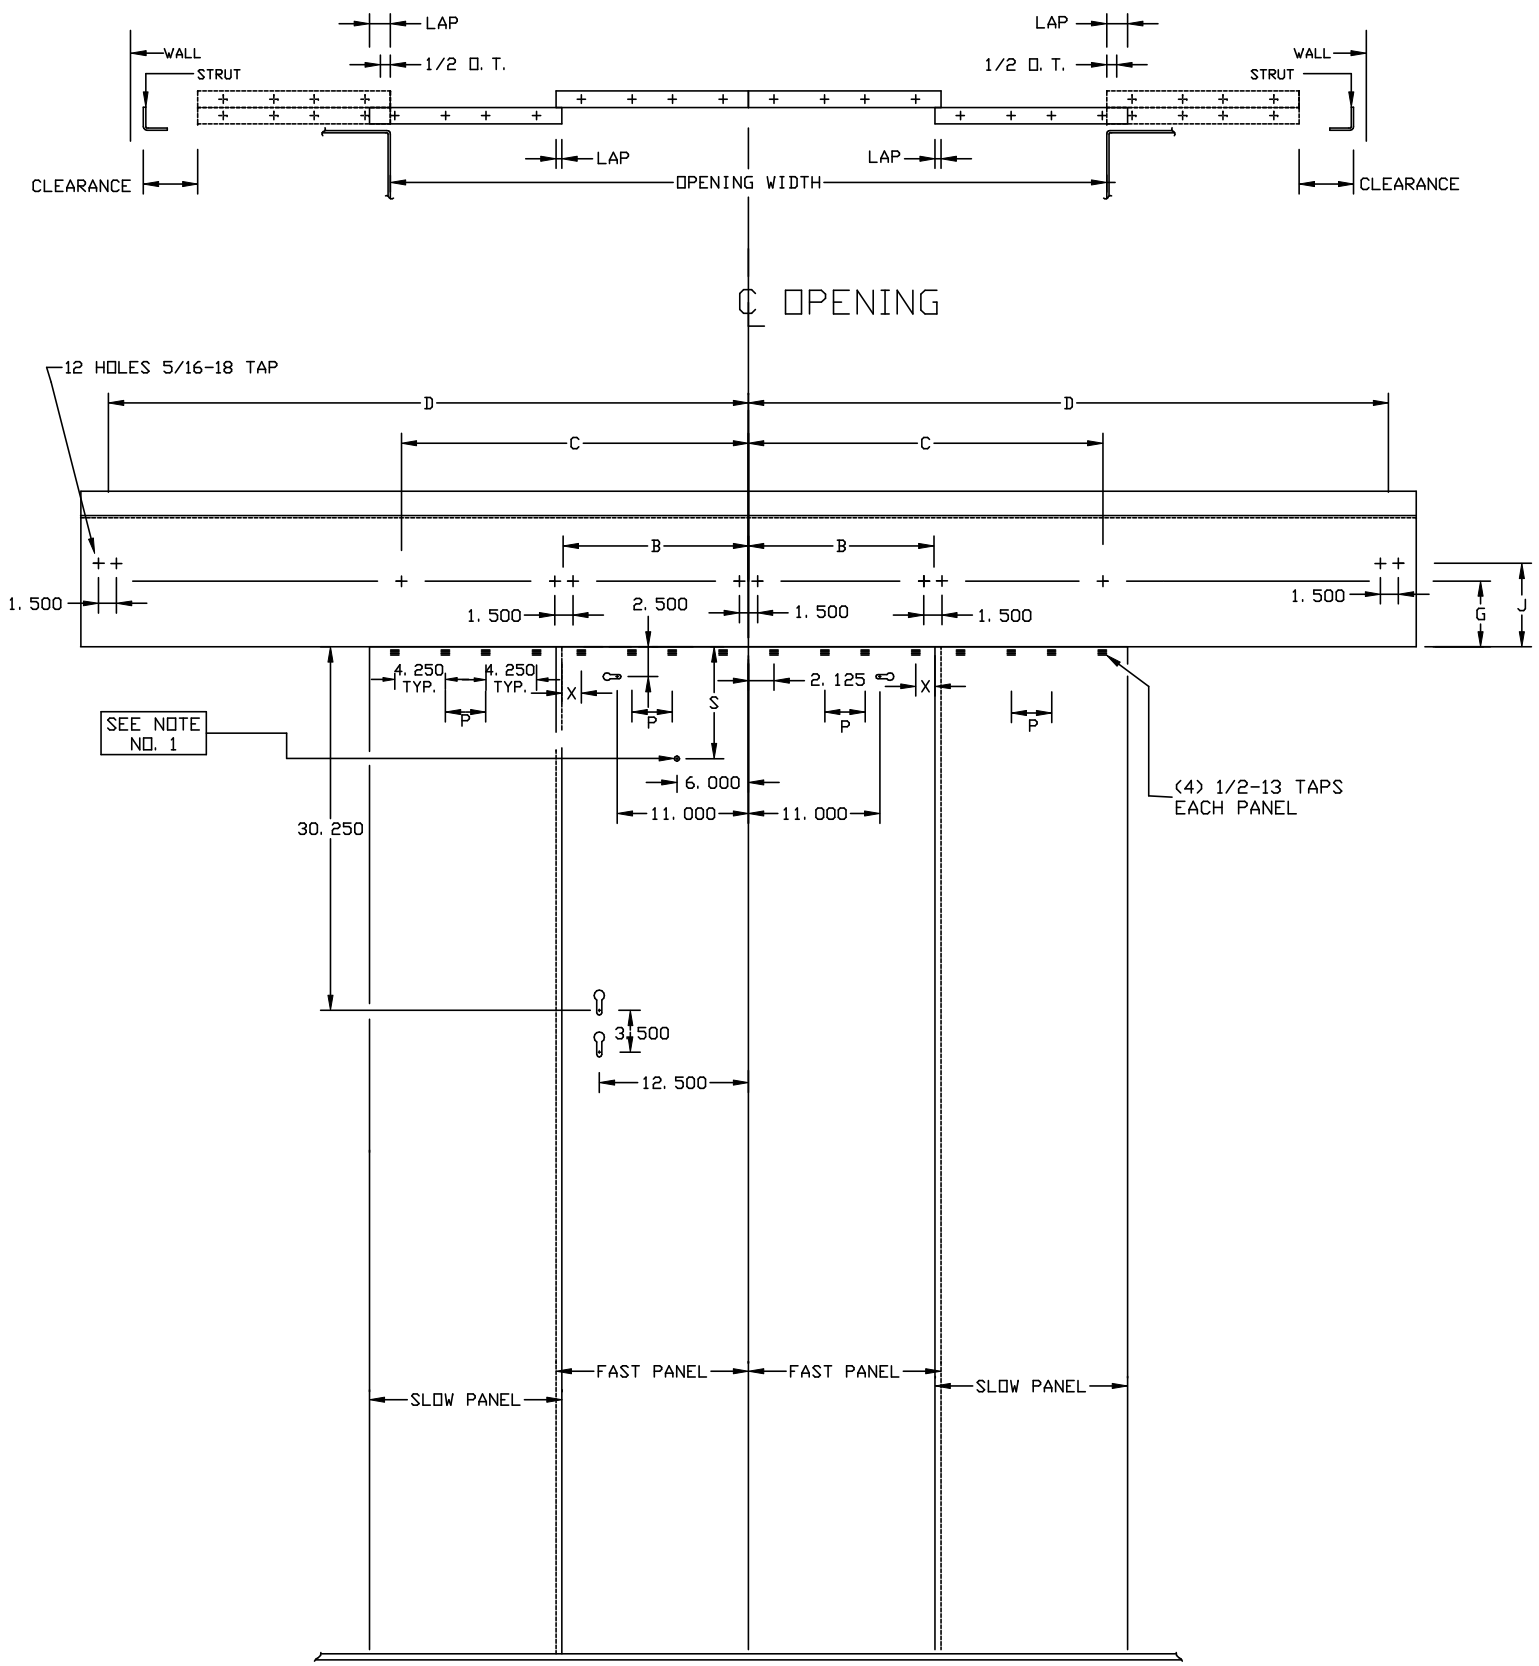

RIGHT HAND SHOWN
LEFT HAND OPPOSITE
ELEVATION VIEW CORRIDOR SIDE

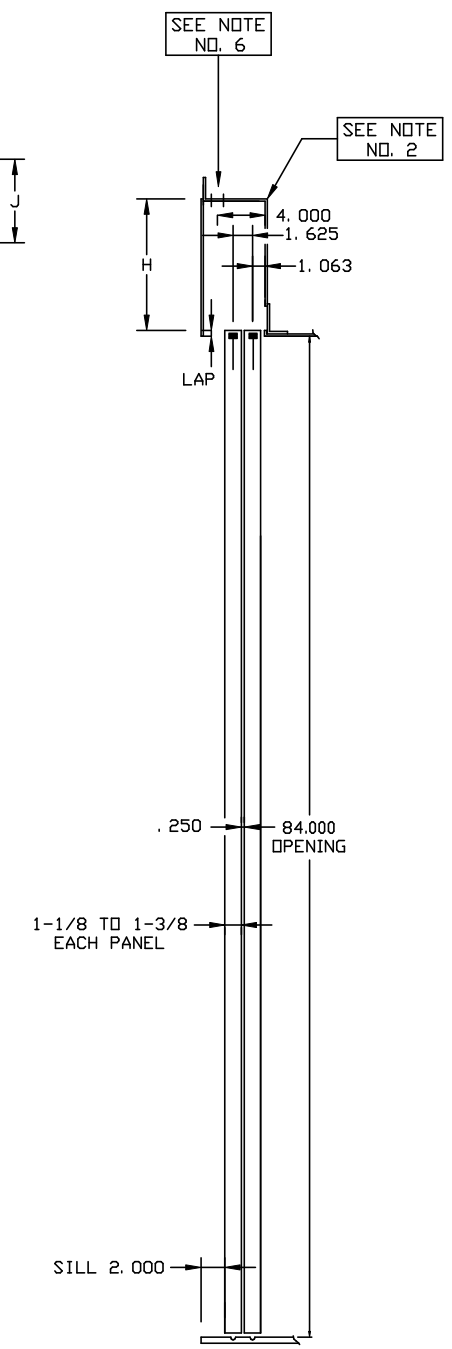

NOTES

1. EMERGENCY KEYWAYS TO BE A 0. 438 I. D. HOLE LOCATED AS SHOWN. IF DOOR HEIGHT CHANGES FROM A 84. 000 PANEL CHANGE THE "S" DIMENSION THE SAME AMOUNT. THE KEYWAYS TO BE PUT ONLY AT FLOORS SPECIFIED BY THE ELEVATOR CONTRACTOR.
2. THE HATCH HEADER TO BE SUPPLIED BY THE ENTRANCE MANUFACTURER.
3. ALL DIMENSIONS SHOWN IN INCHES.
4. ESI MUST BE NOTIFIED IF DOOR OPENING HEIGHT IS OTHER THAN 84 INCHES.
5. MINIMUM 12 GA. INTERNAL REINFORCEMENT REQUIRED BEHIND ALL KEYSLOTS.
6. DRILL A 1. 000 DIAMETER HOLE ON CENTER LINE OF OPENING.

LAP	X
0.500	
0.750	



DETAIL A



DETAIL B

JOB NO. _____
JOB NAME _____
LOCATION _____
CUSTOMER _____
CUSTOMER NO. _____

OPENING= _____
B= _____
C= _____
D= _____
P= _____
PANEL= _____

DOOR HT.	84.500	96.500	108.500	120.500
S	3.500	15.500	27.500	39.500

HANGER POCKET	G	H	J
STANDARD DUTY	4.750	9.250	5.312
HEAVY DUTY	5.500	11.000	7.000

INCH DIMENSIONS
TOLERANCE UNLESS SHOWN
SOURCE/SPEC#/FINISH/WT

THIS INFORMATION IS CONFIDENTIAL AND REMAINS THE PROPERTY OF ELEVATOR SOLUTIONS INTERNATIONAL INC. ITS USE, REPRODUCTION, OR DISSEMINATION WITHOUT THE EXPRESS PERMISSION OF ESI, IS STRICTLY PROHIBITED.

PLOT SCALE: = 9. 00

REV	DATE	CH'K	DESCR

DRAWN BY LJP DATE 07/07/04

ELEVATOR SOLUTIONS INTERNATIONAL INC.
ARKANSAS CITY, KANSAS

NAME
ES-1 & 3
2-SPEED/CENTER
OPN' G HATCH DATA

ESIBORDERB R0, 07-04 B

H-3100a